


# The Diamond PGS

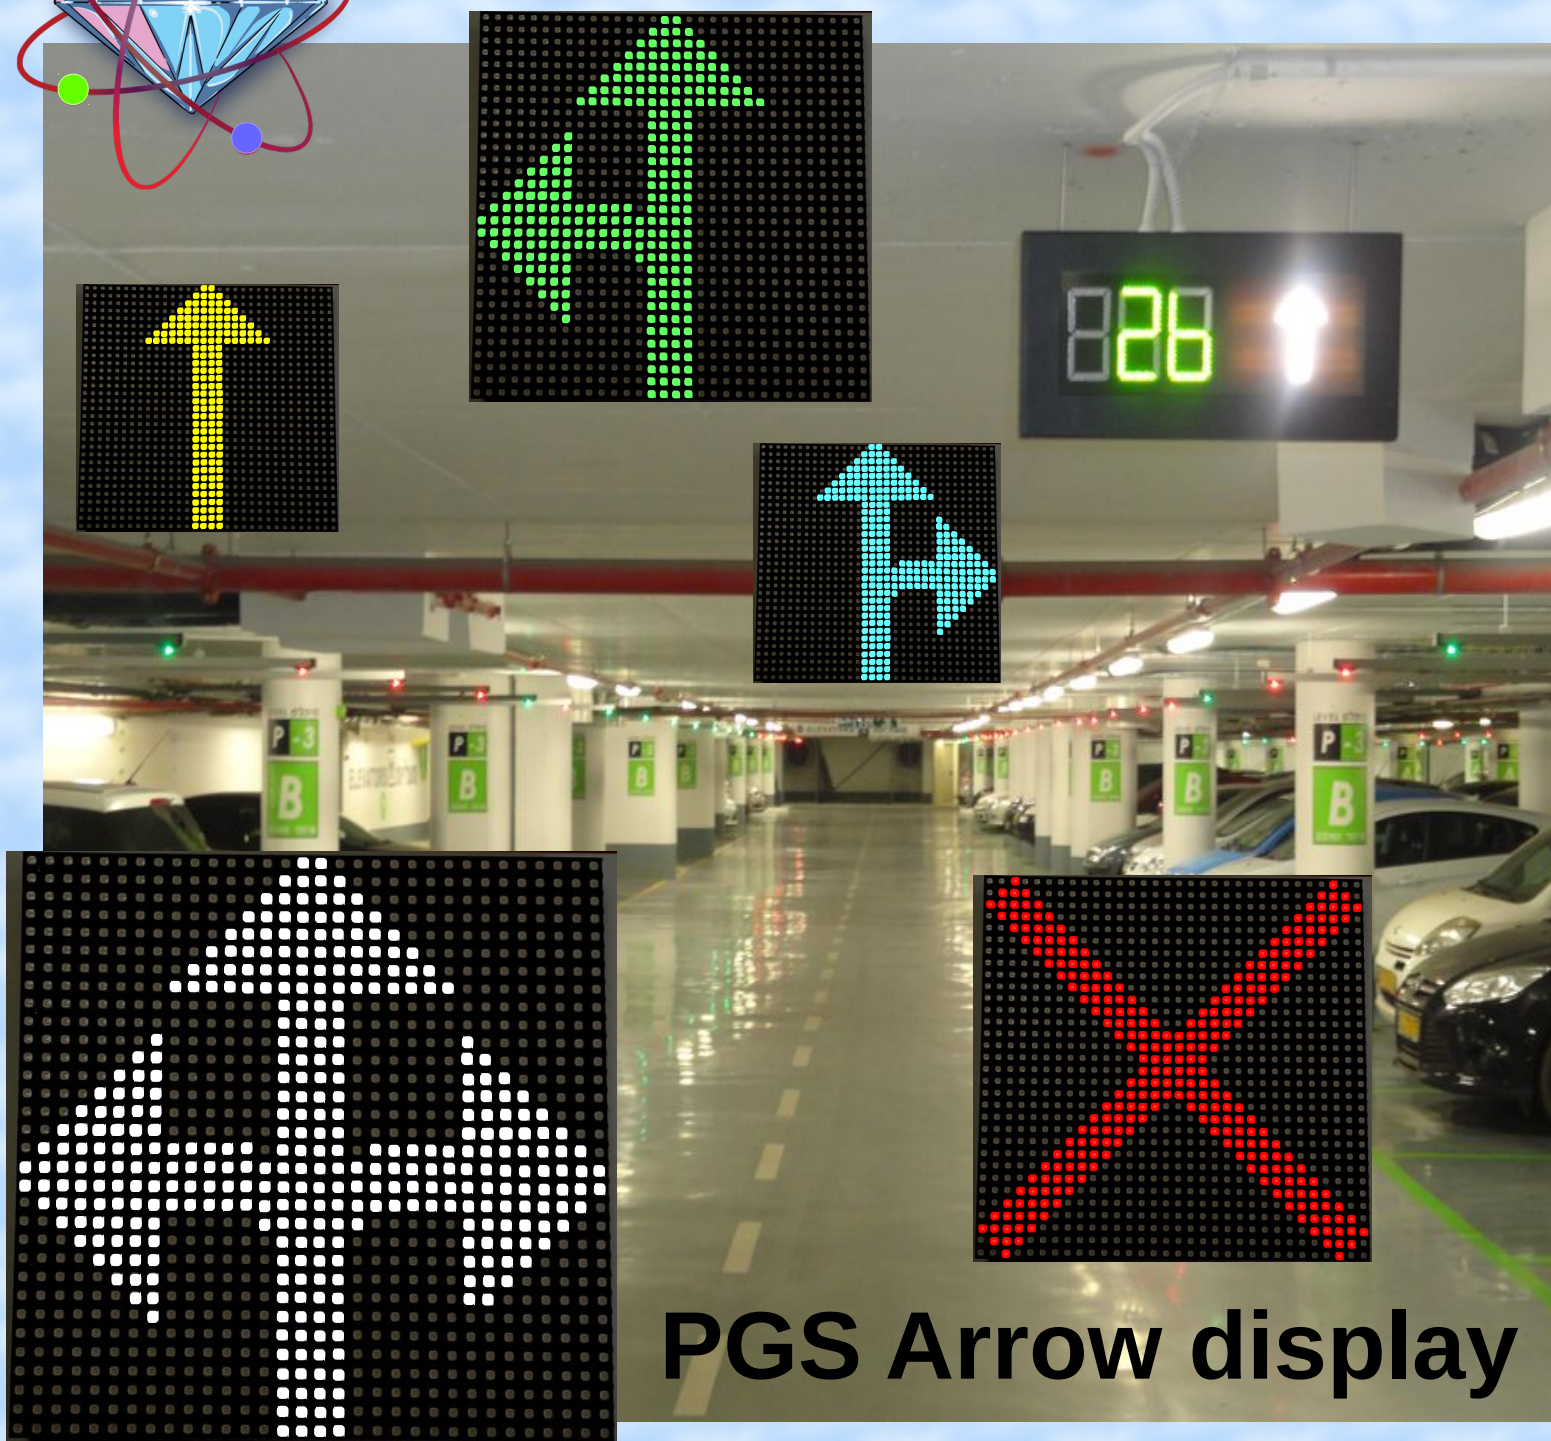

## PGS Arrow display

### Full solution Parking Guidance System

Street address: 1<sup>st</sup> floor, Femco Business park,  
No. 775 Old Pretoria Rd. Wynberg, South Africa  
Postal address: P.O.B 1502 Highlands North 2037  
Tel: +27 (0)11 887-7222  
Email: [info@jves.co.za](mailto:info@jves.co.za)  
Website: [www.jves.co.za](http://www.jves.co.za)

**JOINT  
VENTURES**

Electronic Services [Pty] Ltd

Your Partners for Development, Production & Automatic Testing

# PGS Arrow Display

The PGS 3X125mm Numeric display was designed to act as a parking level, main way finding device, providing drivers with Parking availability advise.

there main features are:

- 1. Full color RGB, Clear, bright and highly visible Arrow display.
- 2. 32 X 32 pixel resolution.
- 3. Available as standard in 192mm 256mm, 320mm module size. Larger sizes are available
- 4. Effortlessly integrate with the greater Diamond Parking Guidance System.
- 5. Effortlessly integrate with the RF Bridge for far and outdoors displays.
- 6. Easy defined control logic.
- 7. RS485 or RS232 communication.
- 8. Easy configuration.
- 9. Easy installation.
- 10. Low cost.

Specifications

- \* Power consumption Less than 10W
- \* Power supply 85VAC to 250VAC
- \* Communication protocols Daisy chain RS232 / Parallel RS485
- \* Lightning protection on all inputs and outputs.

Environmental specifications

- Operating temperature -20° to +70°
- Storage temperature -40° to +85°
- Humidity Up to 98% Non condensing
- Housing Not rated – Must be mounted in an IP65 enclosure
- Dimensions
- Weight
- Safety Standard IEC 60950-1
- RFI/EMI Standard IEC 61000
- European Standard CE



Ordering information:

	RS485	RS232
192mm X 193mm	A-CP/01	A-CA/01
256mm X 256mm	A-CP/02	A-CA/02
320mm X 320mm	A-CP/03	A-CA/03

